




8200CDQ

User Instructions

audiolab

1: Statutory & Safety Information

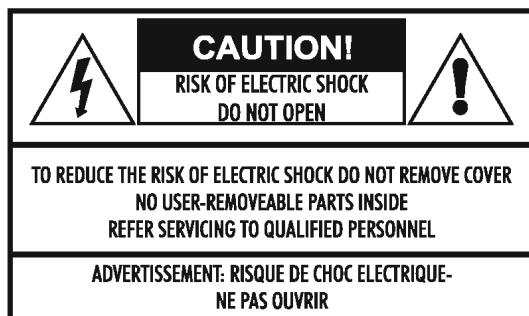

This symbol indicates that there are important operating and maintenance instructions in the literature accompanying this unit.



This symbol indicates that dangerous voltage constituting a risk of electric shock is present within this unit.

IMPORTANT SAFETY INFORMATION

Read these instructions.

Keep these instructions. In the event that you pass the product to a third party this instruction manual should be provided along with the product.

Heed all warnings.

Follow all instructions.

Do not use this apparatus near water.

Clean only with dry cloth.

Do not block any ventilation openings.

Install in accordance with the manufacturer's instructions.

Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.

Do not defeat the safety purpose of the polarized or grounding type plug. A polarized plug has two blades with one wider than the other. A grounding type plug has two blades and a third grounding prong. The wider blade or the third prong is provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.

Protect the power cord from being walked on or pinched, particularly at plugs, convenience receptacles, and the point where they exit from the apparatus.

Use only attachments /accessories specified by the manufacturer.

Warning: The battery (battery or batteries or battery pack) shall not be exposed to excessive heat such as sunshine, fire or the like.



Use only with a cart, stand, tripod, bracket, or table specified by the manufacturer, or sold with the apparatus. When a cart is used, use caution when moving the cart/apparatus combination to avoid injury from tip-over.

Unplug this apparatus during lightning storms or when unused for long periods of time.

Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.

Warning: To reduce the risk of fire or electrical shock, do not expose this product to rain or moisture. The product must not be exposed to dripping and splashing and no object filled with liquids such as a vase of flowers should be placed on the product.

No naked flame sources - such as candles - should be placed on the product.

Caution: Changes or modifications not expressly approved by the manufacturer could void the user's authority to operate this device.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio or television reception, which can be determined by tuning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Re-orientate or re-locate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

This label tells you that the unit contains a Laser component. Opening the unit will expose the user to radiation from the laser beam.

CLASS 1
LASER PRODUCT

WARNING: The means of disconnecting this apparatus from the mains supply is the mains plug. At all times this must be unobstructed, freely accessible, and capable of being removed in an emergency. The mains plug/appliance coupler/direct plug-in adapter is used as disconnect device, the disconnect device shall remain readily operable.


Mains supply and safety

Class I construction. These products must be connected to earth.

Power Cord: An AC power cord is normally supplied with a mains plug suitable for your area. If you have any doubts, consult your dealer about obtaining a suitable power cord.

Mains Supply: The mains voltage of Audiolab units is shown on the rear panel. If this does not match the voltage in your area, consult your dealer. The mains supply fuse is on the rear panel. If it has broken, check for any obvious cause before replacing the fuse with one of the correct rating and type. The fuses for all areas are type T (time lag) AL 20mm.

The fuse values are: 220-230V: T1.0A : 100-120V: T2.0A



The fuse is located in a slide-in carrier which also contains a spare fuse. The carrier can only be pulled out after the IEC power cord is unplugged. When the carrier is opened the first fuse is the spare. Remove and safely dispose of the blown fuse before replacing it.

Important notice to UK users

The appliance cord is terminated with a UK approved mains plug fitted with a 3A fuse. If the fuse needs to be replaced, an ASTA or BSI approved BS1362 fuse rated at 3A must be used. If you need to change the mains plug, remove the fuse and dispose of this plug safely immediately after cutting it from the cord.


Connecting a Mains Plug

The wires in the mains lead are coloured in accordance with the code: Blue: NEUTRAL Brown: LIVE Green/Yellow: Earth. As these colours may not correspond to the coloured markings identifying the terminals in your plug, proceed as follows:

The Blue wire must be connected to the terminal marked with the letter N or coloured BLUE or BLACK.

The BROWN wire must be connected to the terminal marked with the letter L or coloured BROWN or RED.

The Green/Yellow wire must be connected to the terminal marked with the symbol E or coloured GREEN or GREEN/YELLOW or marked with the Earth Symbol.Ⓛ



Ⓛ Protective earthing terminal. The apparatus should be connected to a mains socket outlet with a protective earthing connection.

2: Getting Started

Introduction: 8200CDQ

The Audiolab 8200CDQ is a full-featured CD Player/Preamplifier and DAC of advanced specification and impeccable performance. Please read this manual through carefully before installing and operating the player so that you can enjoy to the full the outstanding qualities of this unit.

Player Features:

Inputs:

- CD disc playback.
- Two external SPDIF stereo LPCM coaxial digital inputs
- Two external SPDIF stereo LPCM optical digital inputs
- Three external analogue inputs.
- USB 2.0 port for replaying stereo from a compatible host.

Outputs:

- Coaxial and optical SPDIF digital outputs to connect an external DAC or digital amplifier when replaying CDs.
- Balanced stereo analog output via XLR connectors for connecting an audio amplifier with balanced inputs.
- Unbalanced stereo analog output via RCA connectors for connecting an audio amplifier with standard inputs.

Operating Features:

- Automatic detection and decoding of external digital input sources.
- Selectable digital filter settings.
- Fully variable analog preamplifier maintains full signal fidelity when replaying both digital and analog sources.
- Digital preamplifier mode available when replaying digital sources enabling the straightest possible signal path.
- The display can be switched on/off as required.
- Infra Red I/O to enable system control with one handset command when connected to suitably enabled units.

The USB Input

The USB input enables computers and other compatible devices with USB connectivity to be connected directly to the player. This topic is one of the most exciting topics in current audiophile circles and has ushered a new appreciation of the capabilities of computer audio.

Although most audio files stored on computers are compressed and of very average quality, the advent of affordable large capacity hard drives enables audiophiles to rip CDs at full resolution and play them via computers with results that are comparable to the same CDs played through the finest CD players.

The DAC and the USB featured in the 8200CDQ series is among the finest in the world irrespective of price.

Important Note:

The 8200CDQ should be used with the outputs connected directly to a power amplifier (or amplifiers). If there are gain control/s on the power amplifier/s, set them to maximum and leave them there. Use the volume control on the 8200CDQ exclusively to alter the level.

Although you can connect the outputs of the 8200CDQ into a line input of a pre-amplifier, the sound quality will be degraded. Only do this if it is absolutely necessary.

Unpacking

Unpack the product fully. The carton should contain:

- The Audiolab 8200CDQ
- One IEC power cord suitable for your area
- One Remote Handset with two AAA batteries
- This instruction manual.

If any item is missing or damaged report this to your dealer as soon as possible.

Retain the packing for future safe transport of your unit. If you dispose of the packing, do so with regard to any recycling regulations in your area.

Placement

Place the unit on a sturdy shelf or table.

The unit is designed to run warm during normal operation.

Do not place anything on top of the unit. If you are using an equipment rack ensure the unit has sufficient space to allow adequate ventilation and is on its own shelf.

Before you connect the 8200CDQ to the mains, ensure your mains voltage corresponds to the rating plate on the rear of the product. If in doubt, consult your dealer. If you move to an area which has a different mains voltage seek advice from an Audiolab appointed dealer or a competent service technician.


Make sure you locate the unit so that the front panel is in view as otherwise the infrared-remote handset will not work.

Before Starting

Your 8200CDQ's performance is determined by the care you take in setting your system up: this includes all connected sources, amplification and loudspeakers.


Please read all the notes regarding playback from computer sources and set up the associated computer audio source with care.

3: Controls and Connectors

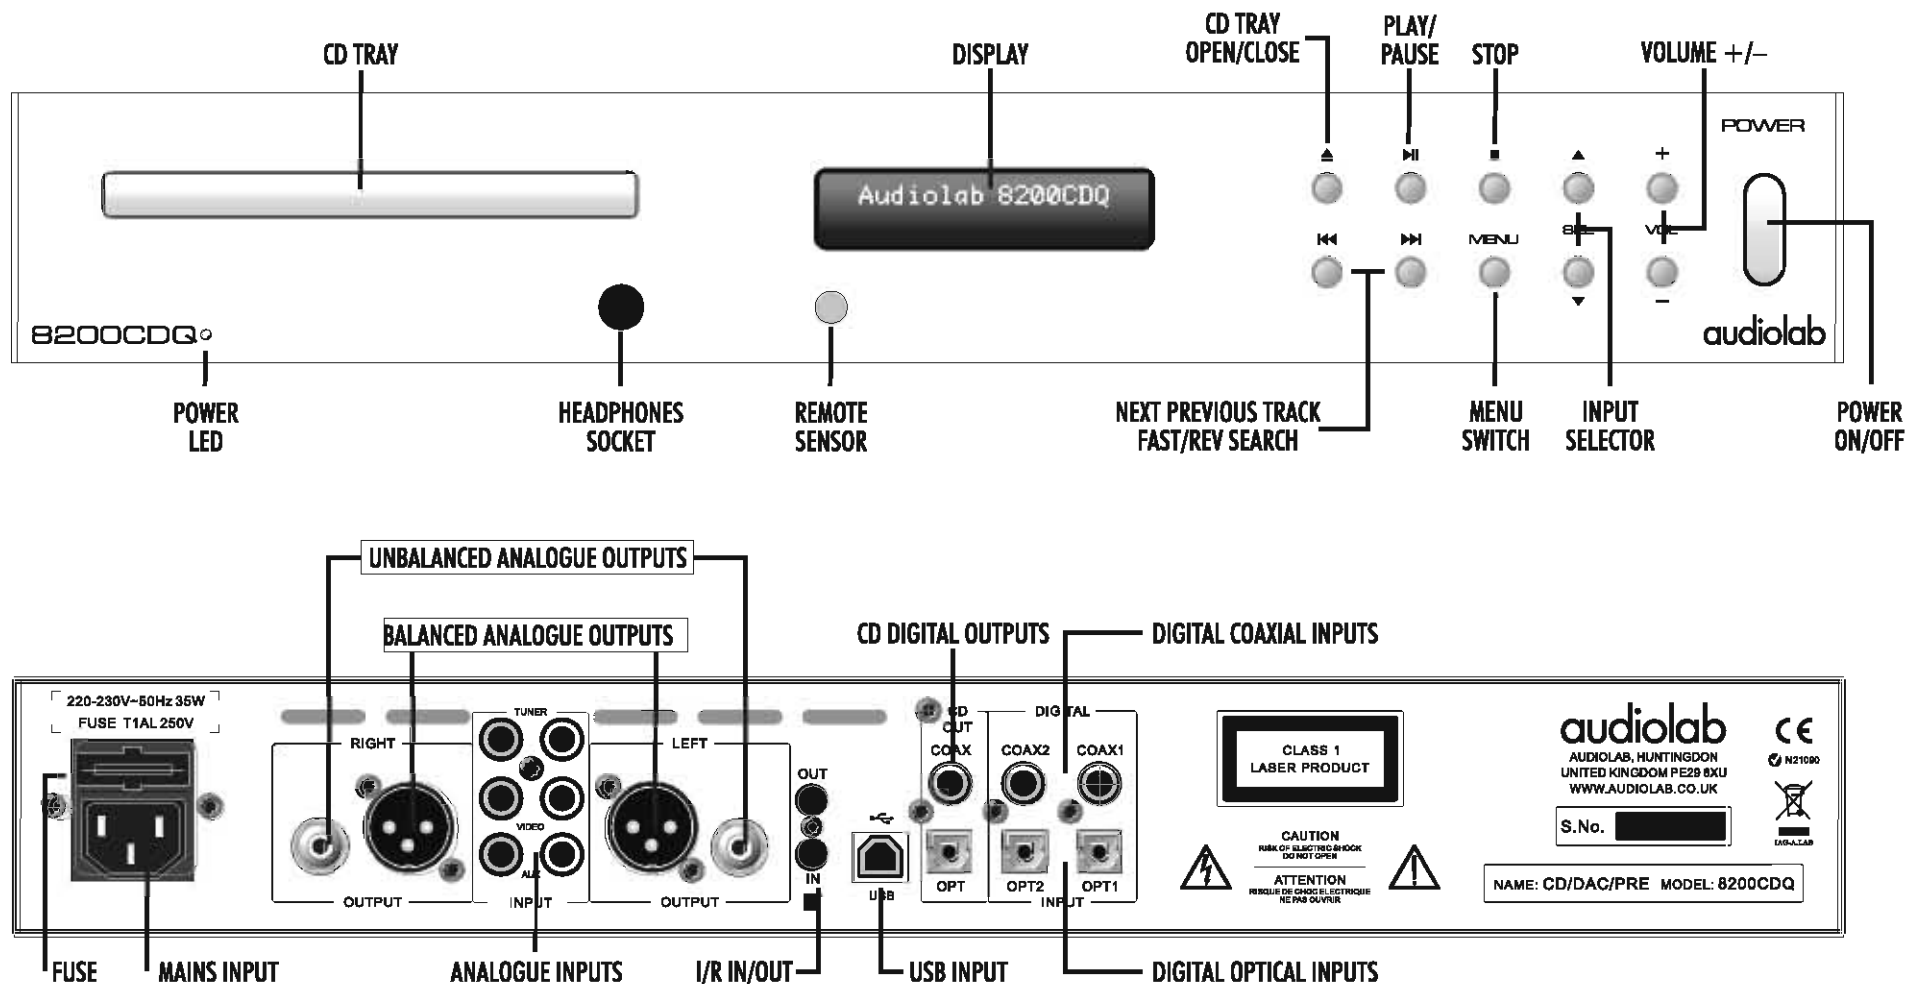

4: Remote Handset

NOTE: The handset buttons shown crossed out are for use with other Audiolab units and are not operational when used with the 8200CDQ.

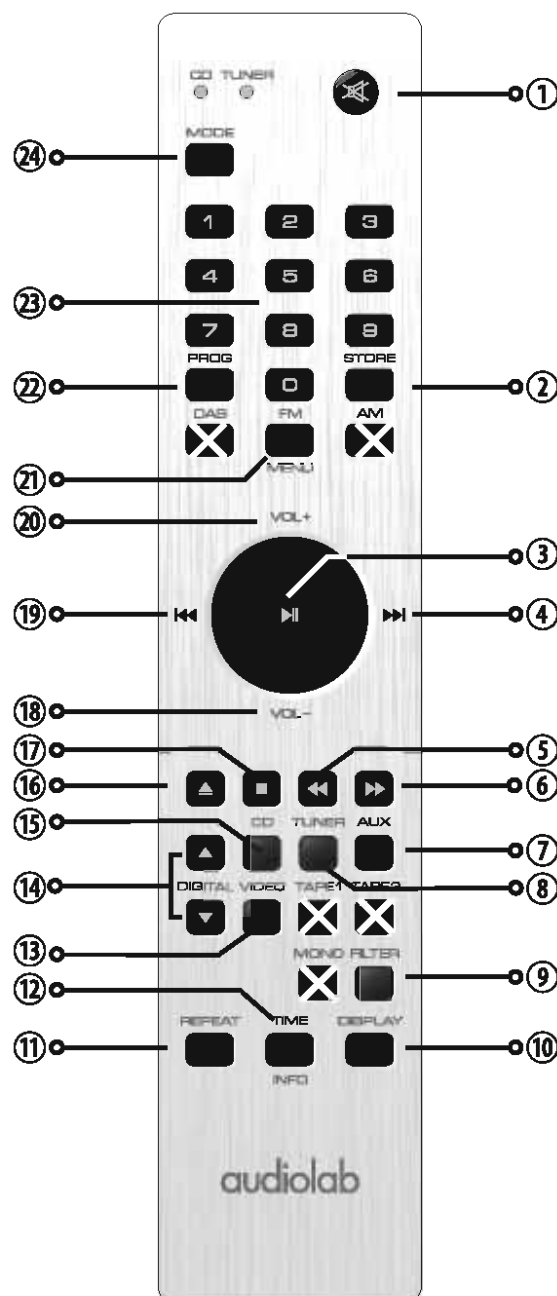

- 1 Press to Mute the sound output.
Press and hold to change preamp mode (digital inputs)
- 2 STORE Store a Program in memory
- 3 Press to start and pause CD/USB playback
- 4 Move to the next track
Press and hold to Fast Forward Search
- 5 Press and hold to Fast Reverse
- 6 Press and hold to Fast Forward
- 7 AUX Select the AUX analogue input
- 8 TUNER Select the TUNER analogue input
- 9 FILTER Select a digital filter
- 10 DISPLAY Press to toggle the display off/on
Press and hold to select display brightness levels
- 11 REPEAT Set a disc repeat mode
- 12 TIME/INFO Press to toggle Track/Disc Time Remaining and Elapsed
Press and hold to toggle CD text display.
- 13 VIDEO Select the VIDEO analogue input
- 14 DIGITAL Press to cycle Digital Inputs
- 15 CD Press to select CD playback
- 16 Press to open/close the disc drawer
- 17 Stop CD/USB play
Leave Menu Mode
- 18 VOL- Lower the Volume
- 19 Press once to replay the current track
Press again to move to the previous track
Press and hold to Fast Reverse Search
- 20 VOL+ Increase the volume
- 21 FM/MENU Press to enter/leave Menu Mode.
- 22 PROG Press to program tracks of your choice
- 23 NUMBER KEYS Press to go directly to a track by number
- 24 MODE Press to toggle the handset from Tuner to CD operation.
The CD/Tuner lights flash to show the selected mode.

Fitting Batteries


Open the cover. Unwrap the supplied AAA batteries and place them in the battery compartment with the polarity as shown. Replace the cover.

Always use AAA batteries and always replace them in sets. Never mix old and new batteries. Very weak batteries can leak and damage the handset. Replace them in good time!


There is a risk of fire and burns if a battery is handled improperly. Do not disassemble, crush, puncture, short external contacts, or dispose of in fire or water.

Do not attempt to open or service a battery. Discard used batteries in full accordance with recycling regulations in force in your area.

1: Open the battery compartment cover



2: Insert 2 AAA batteries



3: Replace the cover

Handset Operation

The handset operates several Audiolab components.

Before using the handset always press the MODE button and check that the CD light illuminates. This puts the handset into CD operating mode.

Point the handset at the remote receiver and press the relevant key. The handset should be within 15 metres of the player and there must be a clear line of sight between the two units.

5: Connections




Make sure all system components are disconnected from the mains before making or changing system connections!

ANALOGUE OUTPUTS

Balanced Output: Balanced connections provide greater headroom and improved S/N ratio. If your amplifier has a balanced input always use the balanced connection. You need one XLR balanced cable per channel. The socket connects to the player and the plug normally connects to the amplifier.

Unbalanced Output: Connect a high quality stereo screened RCA phono lead from the unbalanced outputs of the 8200CDQ to a suitable input of the amplifier.

The balanced and unbalanced outputs should not be used together.

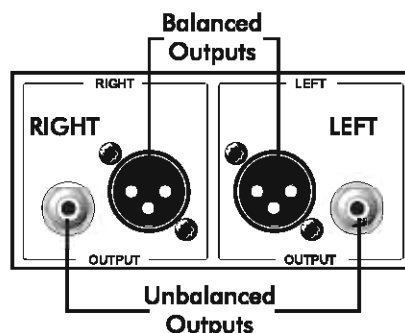

DIGITAL SPDIF CD OUTPUTS

Coaxial and Optical outputs are provided for connecting the 8200CDQ to an external D/A convertor (DAC) or digital recorder. Connect an optical or a digital cable from the appropriate output to the input of your DAC, etc. These connections only operate only when you are playing a CD. Both connections may be used together if required.

HEADPHONE OUTPUT



A stereo 6.3mm (1/4") jack is provided on the front panel for connecting headphones. Connecting headphones mutes the audio output signal from the player.

DIGITAL (SPDIF) INPUTS

Four digital inputs (two Co-axial and two Optical) are provided for connecting the 8200CDQ to an external SPDIF source. The inputs accept uncompressed digital signals, so are connectable to a wide range of digital media including DAT players, Satellite and DVB-T receivers etc. Connect a video or a digital cable from the SPDIF output of the source component to the appropriate input of the 8200CDQ. If you are connecting a DVD player or other multichannel source, set the SPDIF output to PCM Stereo (not RAW) with the Subwoofer OFF.


USB PORT

You must use a certified USB2.0 cable. Connect the cable to the 8200CDQ and then to the computer or other USB digital source.



ANALOGUE LINE INPUTS


Three standard line inputs are provided. Although they are labelled Tuner, Video and Aux, these are for identification only as the inputs are identical. Connect a high quality screened RCA phono lead from the line output of your source component to the appropriate input of the 8200CDQ.



I/R CONNECTIONS

An external 3.5mm remote control bus is included to facilitate connection to suitably equipped 8200 series components and to multi-room controllers etc.

By connecting suitably equipped units in a 'daisy chain' you can establish control over an entire system with one handset.

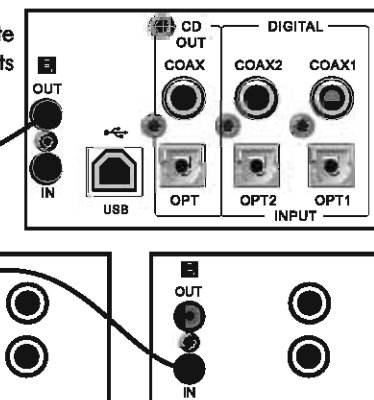

MAINS INPUT

Before connecting the 8200CDQ to the mains supply make sure that all the other connections to your system have been properly and securely made.

Make sure the ON/OFF switch on the 8200CDQ is switched off. (released position).

Switch the mains supply off at the wall socket and then, using the cable supplied, connect the socket on the back of your 8200CDQ to an AC supply outlet.

The player is now ready for operation.



6a: Operation - 1

Switching On and Off

- Connect power to all the system units.
- Switch the mains power on.
- Switch on all source units including the 8200CDQ.
- Finally, switch on the power amplifier/s.

When switching the system off: always switch off the power amplifiers **before** switching off the 8200CDQ.

Whenever the 8200CDQ is switched on:

- The Power LED illuminates, the display shows the Model.
- The Volume level defaults to the last used value.
- The player defaults to the last used input.

Setting the Volume Level

Press the Volume +/- keys to alter the level. The range is -80dB to +3dB in Digital preamplifier mode. Analogue input range is -80dB to +12dB (see P9 - Input Level Trim). 0dB is nominally 2.0V




Audiolab 8200CDQ

Digital Level
USB No Link -36dB

Playing a CD

If not already selected, press the CD button on the handset or cycle the Selector on the front panel to select the CD input.




Reading Level
-36dB

No Disc Level
-36dB

Loading a Disc

Press Open/Close to open the drawer. Load a disc into the drawer



Opening Tray Level
-36dB

Closing Tray Level
-36dB

Close the drawer.

Reading Level
-36dB

Trks Total Level
10 57:12 -36dB

Trk Time Level
1 00:01 -36dB

The disc information will now display.


After reading the track information the disc will stop.

Playing a disc:

Press the Play/Pause key ►► to play a disc.


Press ►► to pause the disc.

Press again to resume play.



Trk Pause Level
2 15:12 -36dB

Press STOP to stop the disc.




Trks Total Level
10 57:12 -36dB

Next Track : Previous Track

Press ►► to move to the next track

Press ◀◀ once to replay the current track.

Press ►►/◀◀ repeatedly to move through the tracks forward or back one track at a time.



'Next Track': If you exceed the number of tracks on the disc, the player will 'wrap round' and play from Track 1.

'Previous Track': If you go past Track 1, the player will wrap round' and reverse search from the final track on the disc.

Direct selection of tracks from the handset

Select the wanted track directly from the keypad:

The disc will play forward from the chosen track.

If you choose a single digit track (e.g. 1) in a disc which contains more than 10 tracks, the player will pause briefly, waiting for you to enter a second digit. If none is entered, play will commence from the entered single-digit track. If the choice is invalid the display reverts to the previous state.

Note: you can preselect a track before you load a disc. When the disc is loaded the player will play from the selected track.

Time/Info Display

1: Repeatedly press the TIME/INFO key on the handset to cycle through the display as shown.



When playing a disc the player remembers the last TIME/INFO display mode set.

If you switch to another input and then back to CD mode the player recalls the last used state and plays from the point at which you changed inputs.

2: Press and hold the TIME/INFO key to toggle the display between **Time** and **Info** mode. In info mode the display shows Album Title and Artist when the disc is stopped and Track Title and Artist while playing. The Info feature requires disc support and can be enabled/disabled in the menu. See Page 8.



Trk Time Level
4 0:01 -36dB

Current track: Time played
Trk Time Level
4 0:01 -36dB

Current track: Time left
Trk Time Level
4 -6:21 -36dB

Total time played on disc
Trk Time Level
4 37:01 -36dB

Total time left on disc
Trk Time Level
4 -19:57 -36dB



Info mode - screen refreshes every 30 secs
Take Five - Dave Bru
Tr3 3m16s -36dB

6b: Operation - 2

Search

Press and hold the Forward Search button to search forward through a track or tracks. If you keep the button pressed, the player will search the entire disc. When the end of the disc is reached the player will cycle around a point 1 second before the end of the disc. On releasing the button the player plays to the end of the disc.

Press and hold the Reverse Search button to search back through a track or tracks. If you keep the button pressed, the player will search back through the disc. When the start of the disc is reached, nothing further will happen. On releasing the button the player plays from track 1.



Repeat

Press the repeat key to cycle the repeat mode.




Program Play

You can create a custom program of up to 30 chosen tracks.

Program mode must be accessed when the disc is stopped.

Example: To enter a program of 4 tracks:

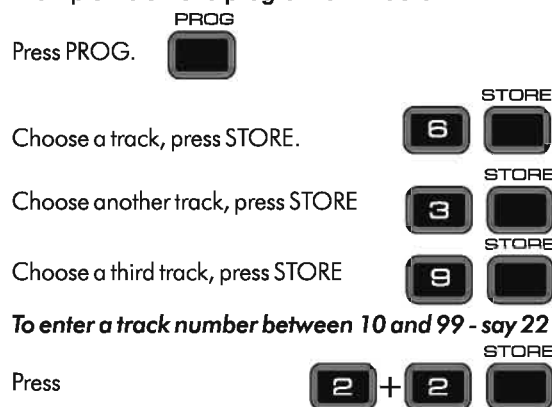

Prg	Time	Level
0	0:00	-36dB
1	4:21	-36dB
2	9:43	-36dB
3	16:28	-36dB
4	19:46	-36dB

To play the program: press PLAY

To stop Program play: press STOP. The program is stored in the player's memory until erased.

To erase a program from memory: Press STOP twice or open and close the disc drawer.

In program mode:


- Repeat program (but not repeat track) is available.
- Time/Info displays track time/track elapsed only.

Selecting an Analogue Input Source

Analogue sources are selectable either directly from the handset or they may be accessed by pressing the SEL buttons on the front panel to cycle the Input.

The inputs are labelled Tuner, Video and Aux: these are for identification only as the inputs are identical.

There are no playback controls active when the 8200CDQ is playing an analogue input.



Selecting a Digital Input Source

Press the DIGITAL +/- buttons on the handset or the SEL buttons on the front panel to select a digital input.

When the input is locked, the front panel will display the input source frequency.

If the input display reads "No Lock" this is because the source is switched off, in standby, or the unit is paused.

There are no playback controls active when the 8200CDQ is processing a digital coaxial or digital optical input.


Notes: We recommend you pass a Digital signal to the 8200CDQ **without** any DSP processing or resampling at the source. This will allow the upsampling circuits in the 8200CDQ to work at their optimum.

If there is a digital volume control on the source unit, set it at maximum and use the volume control in the 8200CDQ to alter the volume level. This may seem counter-intuitive but will preserve optimum performance.

Consult the user manual on your source unit for advice.

When an external input is playing:

- The Volume level is alterable.
- Mute is operational.
- The Display can be switched off/on and the brightness set.



Digital Freq Level
COAX1 44.1k -36dB

Digital Level
COAX1 No Lock -36dB

Headphone Output

A stereo 6.3mm jack is provided on the front panel for connecting headphones. Connecting headphones mutes the audio output signal from the player.

Caution: Playing music at very high volumes, especially if using headphones may permanently damage your hearing.



7a: Setting up the 8200CDQ - 1

Switching the Display on and off

Press the DISPLAY key to toggle the display off and on.

Press and hold the DISPLAY key to bring up the Brightness menu. This enables you to alter the display brightness level.

When the display is OFF: Pressing any key will bring the display on. After a few moments the display will again switch off. Switching the 8200CDQ off and on restores the display.

The Mute Function

Press the Mute key to toggle the sound off/on. Altering the volume level will restore the sound.

Digital Filter

Press the FILTER key to alter the Filter characteristics.

The **"Sharp Rolloff"** filter typifies industrial standard characteristics (-6dB at $\frac{1}{2}$ Fs with significant time-domain ringing) and is included here for comparison purposes.

The **"Slow Rolloff"** filter starts rolling off at a lower frequency than the Sharp Rolloff filter but has a gentle rate of attenuation and significantly less "time-domain ringing".

The **"Minimum Phase"** filter has a gentle attenuation slope similar to the Slow Rolloff option, however it exhibits no pre-ringing in the time domain. It can be likened to an analogue filter applied in the digital domain.

The **"Optimal Spectrum"** filter is a digital filter which implements sampling theory and is designed for near perfect technical response in the frequency domain. This filter also has time-domain pre-ringing which can lead to listener fatigue.

The **"Optimal Transient"** filter exhibits no ringing - the transient nature of the music is preserved. Although this filter exhibits poor performance in technical measurements, sound from this type of filter has a purity and "naturalness" that more than compensates for the lack of technical specifications.

Digital and Analogue Preamplifier Modes

When playing digital sources, press and hold the MUTE button to toggle the Preamplifier Mode between Analogue and Digital. Digital Mode is technically superior; on the other hand some listeners may prefer the "smoother" sound of the Analogue Mode.

The Audiolab 8200CDQ is unique in offering a choice of filters and output modes to meet your listening expectations.

DISPLAY



Display Brightness
High



Trk Time Muted
4 37:01 -36dB

Digital Filter
Sharp Rolloff

Digital Filter
Slow Rolloff

Digital Filter
Minimum Phase

Digital Filter
Optimal Spectrum

Digital Filter
Optimal Transient



Preamp Mode
Analogue

Preamp Mode
Digital

THE MENU FUNCTION

The menu enables you to optimise the player to your requirements and ensure a seamless interface with other partnering equipment in your system.

Before entering the menu:

- First select the source whose parameters you wish to alter.

To enter the menu:

- Press **FM/MENU** on the handset or **MENU** on the front panel.

To navigate in the menu:

- Press the **▶▶|◀◀** buttons to select a parameter.
- Press **▶||** or the **SEL** keys on the front panel to alter a setting.
- Press the **■** or the **MENU** button to exit Menu mode and return to normal operation. If no key is pressed, after 5 seconds the player automatically exits the menu.

When navigating the menu, only those options relevant to the selected source are available. Options not applicable are skipped.

Setting the Preamp Mode (Affects all Digital Sources)

- Select the current Output Mode with the **▶▶|◀◀** buttons
 - Press **▶||** or the **SEL** keys to select Digital/Analogue mode
- Refer to the previous column for more information.

Altering Digital Filter settings (Affects all Digital Sources)

- Select the current Digital Filter with the **▶▶|◀◀** buttons
 - Press **▶||** or the **SEL** keys to change the filter characteristics.
- Refer to the previous column for more information.



CD-Text Display Settings (CD input Only)

- Select the current CD-Text mode with the **▶▶|◀◀** buttons
- Press **▶||** or the **SEL** keys to enable CD-Text

Refer to Page 8 for more information.

Display Brightness Settings (Global - affects all inputs)

- Select the current Display Brightness with the **▶▶|◀◀** buttons
 - Press **▶||** or the **SEL** keys to select Low/Medium/High
- Refer to the previous column for more information.



Preamp Mode
Analogue

Preamp Mode
Digital

Digital Filter
Optimal Transient

Display Brightness
High

7b: Setting up the 8200CDQ - 2

SDM Modulator Mode (Affects all Digital Sources)

- Select SDM Modulator mode with the ◀▶ buttons
- Press ▶ or the SEL keys to select Low Bit/High Bit.

The Sigma-Delta (SDM) modulator mode changes the way the DAC operates internally.

The Sabre ESS 32 9018 DAC used in the 8200CDQ consists of 8 independent DACs capable of simultaneously converting 8 channels (In Home Theatre speak 7.1 Ch.). For Stereo (2 Channel) operation this DAC can be configured in two ways.

“Low Bit” mode uses two stacks of four DACs operating in parallel. This offers the theoretical best performance, optimising noise and headroom.

“High Bit” mode operates the DAC as two single DACs in a very high resolution array. Although not theoretically “perfect” this operating mode sounds significantly more “natural” in Audiophile systems, in particular when replaying old (and especially old analogue) recordings.

Uniquely the 8200CDQ offers you the choice of modes and it is quite possible that you may prefer different modes when listening to different recordings.

Setting the USB Audio Mode (USB input only)

The 8200CDQ is fully compatible with current Windows, Mac and Linux platforms, and with current USB enabled Mac products. With certain legacy products the interface with the 8200CDQ may either be imperfect, or even non-functional.

The 8200CDQ is fully asynchronous, reflecting best practice. A “Compatibility Mode” may be invoked to assist with compatibility issues when using the 8200CDQ with legacy devices. **This mode should only be set when absolutely necessary as it impacts on the performance of the unit.**

- Select the USB input. Enter Menu mode
- Select **USB Audio mode** with the ◀▶ buttons
- Press ▶ or the SEL keys to toggle Asynchronous /Compatibility mode.



Note: If you are using the 8200CDQ with different USB sources, always enable Asynchronous mode where possible.

Setting the DPLL Bandwidth (SPDIF inputs only)

The SPDIF digital inputs of the 8200CDQ are tolerant of high-jitter digital streams. In extreme cases and especially when receiving input from certain DVB-T and satellite receivers, games consoles etc., the jitter from these sources may be so high that the interface suffers from clicking, drop-outs etc.

As supplied the 8200CDQ is set to Auto mode for maximum compatibility with digital sources. However, each of the four digital inputs may be altered to be more/less tolerant of jitter so you can customise each input to suit your requirements.

These parameters should only be changed if you are experiencing difficulties

- Select the required SPDIF input. Enter Menu mode
- Select **Input DPLL** with the ◀▶ buttons
- Press ▶ or the SEL keys to alter the settings.

Digital Input DPLL
Auto Bandwidth

Auto Bandwidth: this is the default setting.

Low Bandwidth: this setting offers the best performance but with the lowest tolerance of source jitter errors.

Medium Bandwidth:

High Bandwidth: this offers the greatest tolerance to high jitter or unstable data streams but with reduced performance.

Home Theater Mode (All analogue inputs)

Home Theater Mode if enabled simply sets the gain to a fixed 0dB on the selected input-other inputs are unaffected.

- Select Home Theater Mode with the ◀▶ buttons
- Press ▶ or the SEL keys to Enable/Disable HT Mode.

Enabling/Disabling
Home Theater Mode

Home Theater Mode
Enabled

Analogue input screen
in Home Theater Mode

Analogue
TUNER Home Theater

Input Level Trim (All analogue inputs)

Analogue sources may have widely differing output levels - often as much as 18dB between a tuner and a DAT Player. The level of each input can be trimmed so that different analogue sources play at similar levels, removing sudden jumps in volume when switching between analogue sources.

The input trim level can be set in the range +24dB to -24dB.

- Select **Input Level Trim** with the ◀▶ buttons
- Press the SEL keys to alter the settings.

Input Level Trim
-3dB

The displayed Level in dB will adjust by the selected number of dBs when you switch to that input and when you go to another input it will return to nominal. For example If the TUNER input has a -3dB trim selected, and you are playing a CD with a displayed level of -20dB, if you now switch to TUNER the level will be -23dB; when you go back to CD it will again be -20dB.

After making any change:

- Press the ■ or the MENU button to return to normal operation. If no key is pressed, after 5 seconds normal operation will automatically restore.

Note: As there is no means of restoring the 8200CDQ to factory defaults, do not change any setting unless it is necessary and you know exactly what you are doing.

8a: Using the 8200CDQ with a PC -1

Installation - Windows XP

The operating system must be Windows XP (SP2 or above).

It is essential that you use a fully certified USB 2.0 cable i.e a maximum length of 5 metres. Never use USB extension cables.

Switch the PC on and let it boot up.

Plug the USB cable into the 8200CDQ and the computer and then switch the CD player on. The player software will now interface with the computer and the drivers will automatically load. When the drivers have loaded you will see an information screen saying something like "Audiolab 8200 Series is now ready for use" - the actual words will depend on the installed version of Windows.

This process is automatic and normally needs no user intervention. The input does not have to be set to USB during this process. Please have your Windows Installation Disc available if prompted.



To check that the PC has recognised the player:

Navigate to "Control Panel"

Click on "Sounds, Speech and Audio Devices"

In the next screen click on "Sounds and Audio Devices"

Confirm that "Audiolab 8200 Series" is the default device.

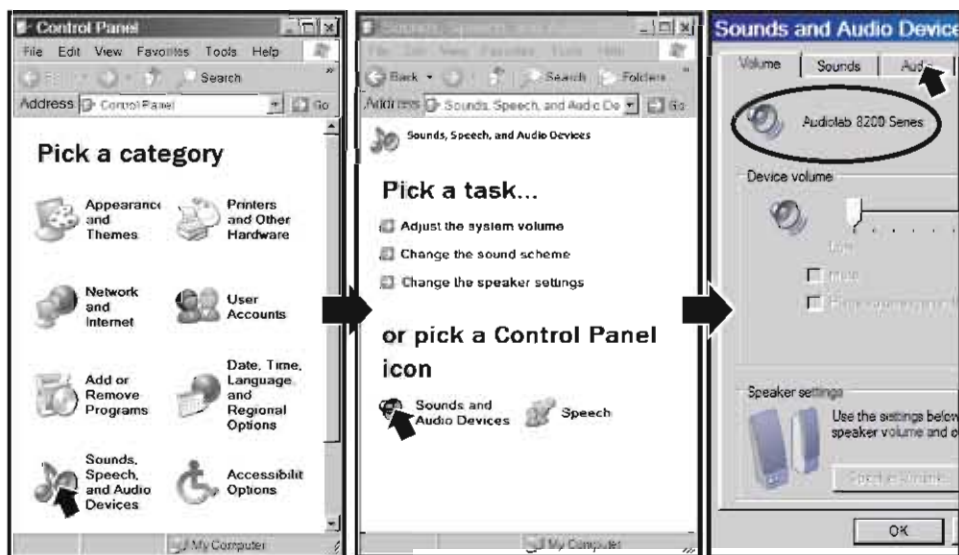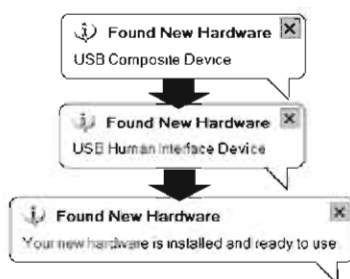

If the 8200CDQ is not selected as the default device:

Click on the "Audio" tab,

Select "Audiolab 8200 Series" from the list. Click OK.

Disabling Windows sounds

If you are listening to the 8200CDQ while working at your PC you can suppress most of the Windows sound effects:

Click the "Sounds" tab.

In the next screen, select "No Sounds". Click "OK" to confirm.

- The device is "Plug and Play": When you disconnect or switch off the 8200CDQ the default sound device in your PC will automatically be re-selected.
- If you disconnect the 8200CDQ remember to deselect "No Sounds" in your Windows Sound scheme to restore the Windows sound effects.




Installation - Windows Vista/Windows 7

Use a fully certified USB 2.0 cable i.e a maximum length of 5 metres. Never use USB extension cables.

Switch the PC on and let it boot up. Plug the USB cable into the 8200CDQ and the computer and then switch the CD player on. The player software will now interface with the computer and the drivers will load. The input does not have to be set to USB during this process. Please have your Windows Installation Disc available if prompted.

To check that the PC has recognised the player:

Go to Start/control Panel/all Control Panel Items

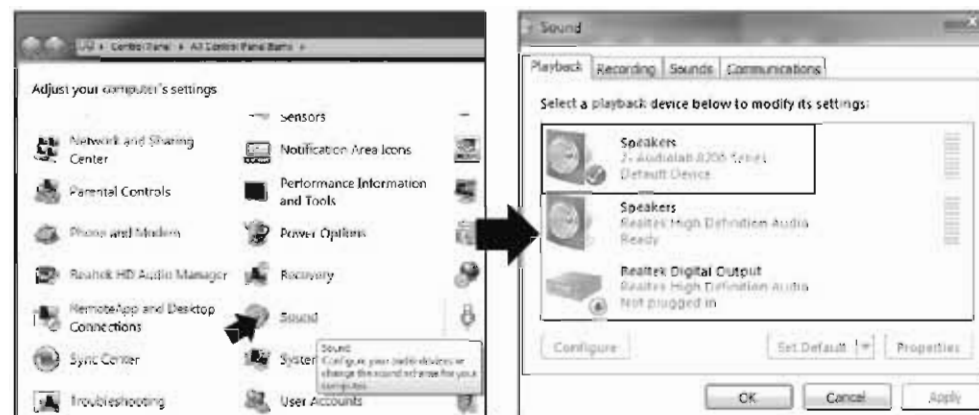


Click "Sound". "Audiolab 8200 Series" should appear as the default device.

8b: Using the 8200CDQ with a PC - 2

If "Audiolab 8200 Series" does not appear as the default device, enable it. A green check mark appears by the default selection


A: Select "Audiolab 8200 Series"

B: Click **Properties**

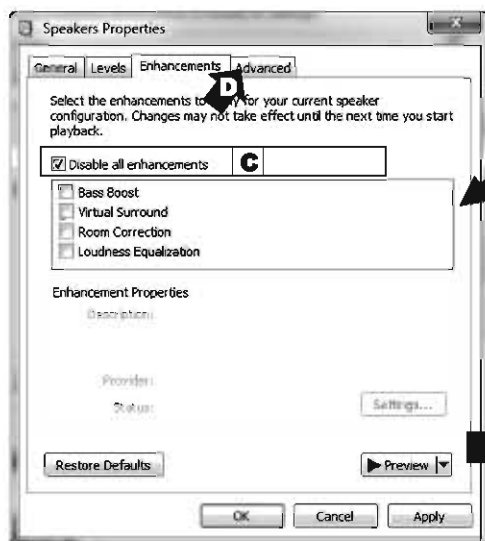


E: Select "24 bit, 44,100 Hz (Studio Quality)"

F: Click **OK**

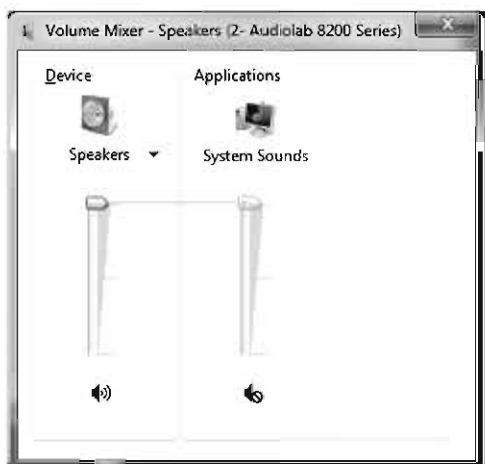

C: Ensure "Disable all enhancements" is ticked.

D: Click **Advanced**.

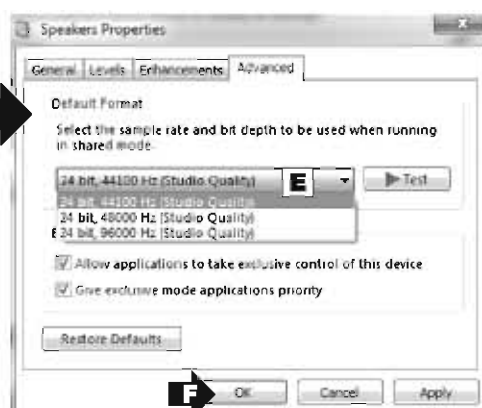

Launch the **Volume Mixer** utility from the taskbar.

Set the "Speakers" setting to Maximum. All levels should be controlled from your pre-amplifier.

Set "System Sounds" to minimum. This will suppress most of the Windows sound effects.

Setup is now complete.

Basic Operation

Verify that the 8200CDQ is selected as the default player.

Use your preferred media player.

Set a low volume level on the 8200CDQ (or set Mute to on).

Make sure the Volume control is at full on the media player and in the PC control panel.

Press the DIGITAL +/- buttons on the handset or the SEL button on the front panel to select the USB input.

Select the music source in the PC and commence play.

Control the volume level via the 8200CDQ.

Press ► to play or

Choose a track with the ◀◀/▶▶ buttons: (press ► if necessary)

Press ▶▶ or ◀◀ to choose the next/previous tracks.

Press ► to pause and restart play.

Press and hold ▶▶ or ◀◀ to forward search.

Press and hold ◀◀ or ▶▶ to reverse search.

Press ■ to stop play.

*Functions depend on support from the chosen media player.

Advanced Playback in Windows

The default Windows Media Player is not capable of ultimate Audiophile performance.

Windows XP: To achieve bit perfect results you need an ASIO driver and a media player that can handle ASIO streams.

Windows Vista (SPI and above) and Windows 7: feature WASAPI, which was created specifically to get bit perfect data out, bypassing any internal mixers. ASIO is also usable and as it is applicable to all platforms this is the method we will feature here.

ASIO (Audio Stream Input/Output): ASIO installs a direct path from input to output. A free open-source ASIO driver is ASIO4ALL downloadable here: <http://www.asio4all.com/>.

Media Players: At the time of writing, the preferred player is Foobar 2000. This is a free open source media player, highly configurable with ASIO and WASAPI support. This tutorial will help you get started with Foobar and ASIO.

Getting Started with Foobar 2000: Enter this link in your web browser to download and install Foobar 2000: <http://www.foobar2000.org/download>.



Input playing or player paused

Digital	24bit	Level
USB	44.1k	-36dB

Player in STOP mode

Digital	Level
USB	-36dB

No input

Digital	Level
USB	No Link -36dB



9a: Using Foobar - 1

Using Foobar with Windows Vista and Windows 7

- Install Foobar. You will have to "allow" the installation.
- Accept all the standard prompts.

- Open Foobar and click **File/Preferences**

- In the Preferences Dialogue click "**Playback**"
- Make sure that "Replay Gain is" set to "**None**."

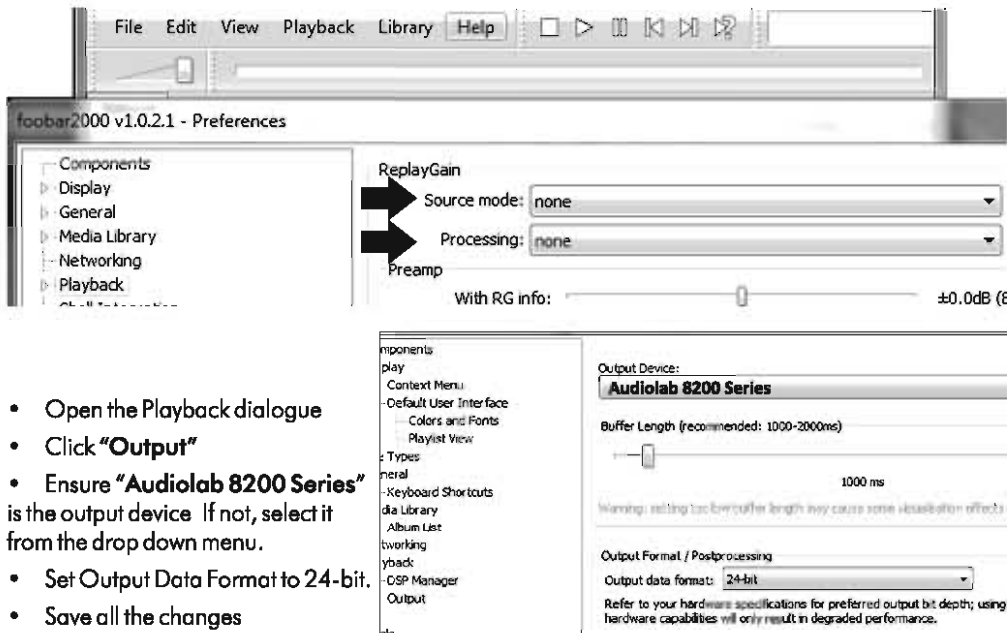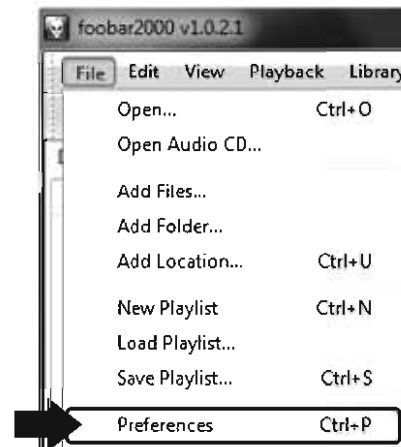



- Open the Playback dialogue
- Click "**Output**"
- Ensure "**Audiolab 8200 Series**" is the output device. If not, select it from the drop down menu.
- Set Output Data Format to 24-bit.
- Save all the changes

Foobar 2000 is now configured and ready for use.

Refer to the next column for ASIO installation.

Using Foobar with Windows XP

- Install Foobar.
- Accept all the standard prompts.
- Open Foobar and click **File/Preferences**
- In the Preferences Dialogue click "**Playback**"
- Make sure that "Replay Gain is" set to "**None**."

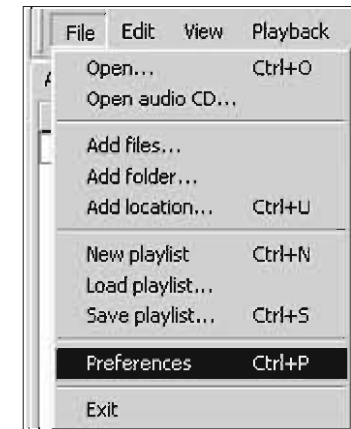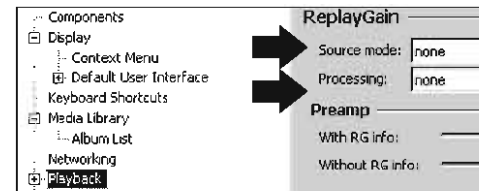

- Open the Playback dialogue
- Click "**Output**"
- select "**Audiolab 8200 Series**" from the drop down menu.
- Set Output Data Format to 24-bit.
- Save all the changes

Foobar 2000 is now configured.

Although the installation is now operational, to release the sonic potential of the 8200CDQ we now need to install ASIO.


INSTALLING ASIO SUPPORT IN FOOBAR

To install ASIO into Foobar you need two utilities:

ASIO4ALL downloadable here: <http://www.asio4all.com/>.

The ASIO Plugin for Foobar downloadable from the Foobar site.

- Access the Foobar site, click on **Components**.
- Select **ASIO Support** from the list and click on the link.
- In the next screen click "Download". The file is zipped.
- Extract the plug-in and place it on the PC desktop.

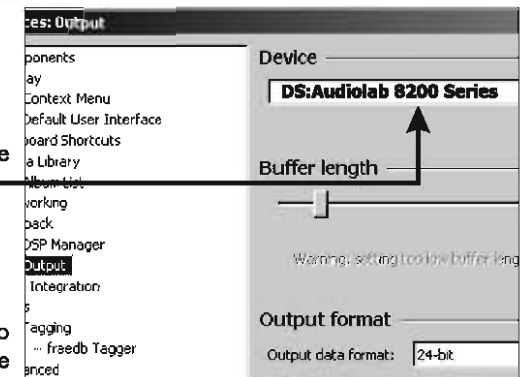

Overview	Download	Components	Screenshots
ASIO support 1.2.7			
Tags: asio			
2009-03-22			
Adds ASIO output support			

9b: Using Foobar - 2

Configuring Foobar and ASIO4ALL


- Install ASIO4ALL:

To install the ASIO plugin into Foobar:


- Make sure Foobar is closed
- Navigate to the Foobar program folder. This will normally be found in C:\Program Files\foobar2000.




- Open the "Components" folder
- Drag the plug-in into the folder to install it.
- Close all windows.

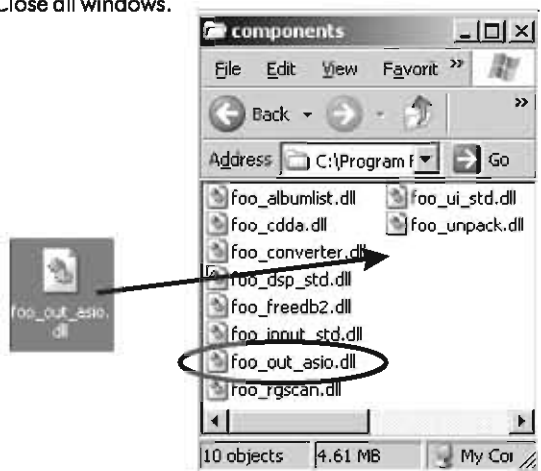

- Open Foobar.
- Click File/Preferences: Select "ASIO Virtual Devices"
- Click "Add New". The program will search for devices.

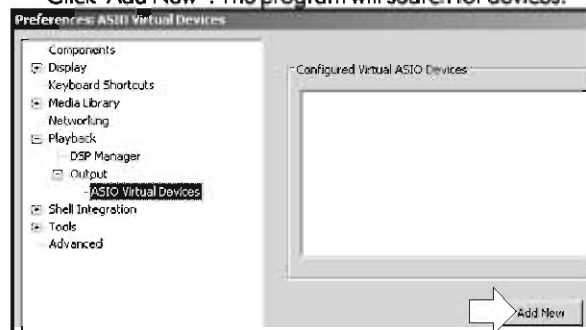

If there are no soundcards in the PC capable of ASIO operation, Foobar will find the 8200CDQ. If there is an ASIO capable device, Foobar may find only the installed device. You may see something like:

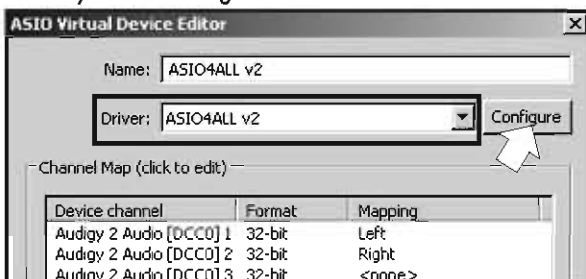


- Select ASIO4ALL as the driver.
- Click "Configure".

The ASIO4ALL setup screen will now deploy



- 1: Move the highlight to "Audiolab 8200 Series"
- 2: Set the ASIO Buffer Size to 2048 samples
- 3: Make sure these boxes are unchecked
- 4: Close the screen

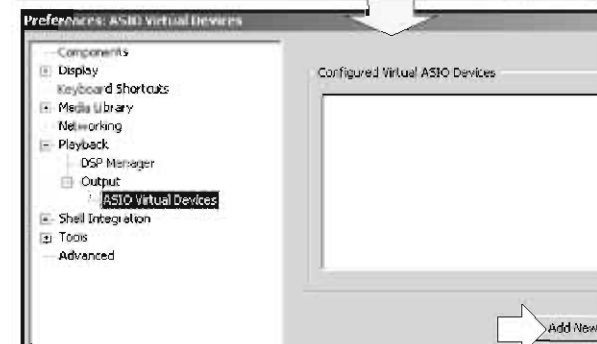


- Click "Add New". Audiolab 8200 Series will appear.



- Click OK to close the screen. ASIO4ALL will now appear in the ASIO Virtual Devices box and the 8200 will be enabled.
- Click OK to close preferences and save the new settings.

9c: Using Foobar - 3


Final Configuration

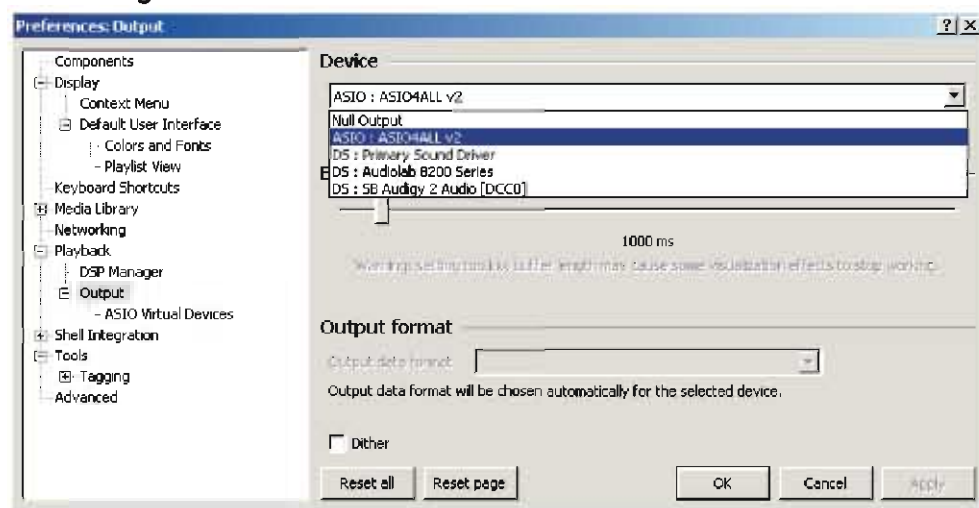

- Open Foobar. Click File/Preferences/Output
- Open **"Devices"**. Select **ASIO4ALL** from the menu.

Note: If you select **DS: Audiolab 8200 Series** you will use the Direct Sound (DS) kernel in Windows XP. This will not provide Bit Perfect reproduction.

Using Foobar

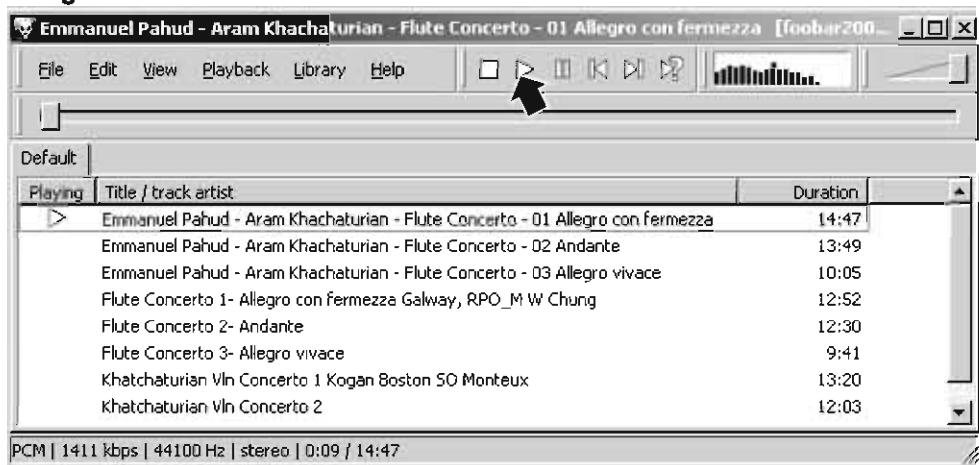

- Launch Foobar
- Select the location or library that holds your audio files. Press PLAY

If all is well you will hear sound through the 8200CDQ.

You will also see the bit depth and sampling frequency on screen

ASIO settings:

When Foobar is playing, you will see this shortcut (green triangle) in the Quick Launch toolbar at the bottom right of your screen.



Click the shortcut to bring up the ASIO setup screen - refer to the previous page for guidance.

Player Operation

Set a low volume level on the 8200CDQ (or set Mute to on).

Make sure the Volume control is at full on the media player

Press the DIGITAL +/- buttons on the handset or the SEL button on the front panel to select the USB input.

Control the volume level via the 8200CDQ.

Press ► to play or

Choose a track with the ►◄◄ buttons: (press ► if necessary)

Press ►► or ◄◄ to choose the next/previous tracks.

Press ► to pause and restart play.

Press ■ to stop play.

Disconnecting the 8200CDQ

If the 8200CDQ is permanently installed to the PC there should be no need to adjust any of the Foobar parameters.

When the player is disconnected from the PC it may be necessary to re-configure Foobar to play through another connected device.

- Open Foobar. Click File/Preferences/Output
- Open **"Devices"**.
- Select the alternative device from the list.
- Click OK.

When the 8200CDQ is reconnected to the PC, repeat the procedure and re-enable **"ASIO4ALL"** or **"Audiolab 8200 Series"** as you require.

*Input playing: Win 7, Vista
XP via Direct Sound*

Digital 24bit Level
USB 44.1k -36dB

Input playing: ASIO

Digital 16bit Level
USB 44.1k -36dB

Player in STOP or pause mode

Digital Level
USB -36dB

No input

Digital Level
USB No Link -36dB

10a: Using the 8200CDQ with a Mac - 1

Introduction

Modern Macs come pre-loaded with Apple iTunes. Although it is possible to use alternative Media Players, iTunes has outstanding audio characteristics, and hosts a variety of advanced features. The Mac platform should ideally be OS 10.4.11 or above. The 8200 will also interface with certain other Apple devices - refer to your user manual for guidance.

It is essential that you use a fully certified USB2.0 cable. USB extension leads should be avoided.

Switch the Mac on and let it boot up. Plug the USB cable into the 8200CDQ and the Mac and then switch the 8200CDQ on. The device drivers will load in the background.

Initialising the 8200CDQ

Click on the "System Preferences" icon in the dock.




In "System Preferences"

Click on the "Sound" icon



In "Sound"


Click on the "Output" tab

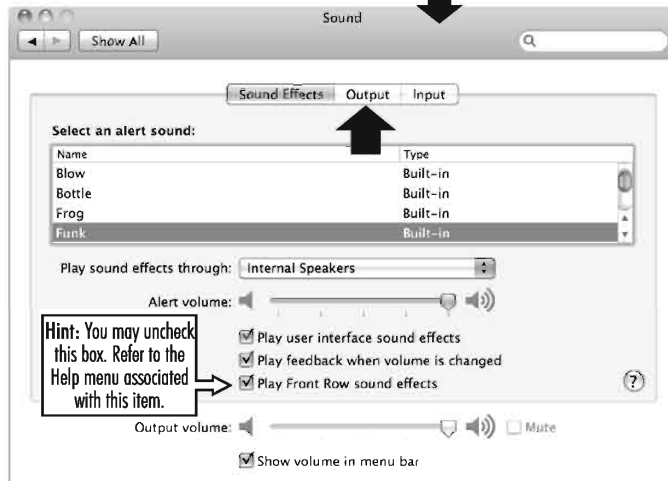

In "Output"

Select the "Audiolab 8200 Series" icon as the device for sound output

Close the window.

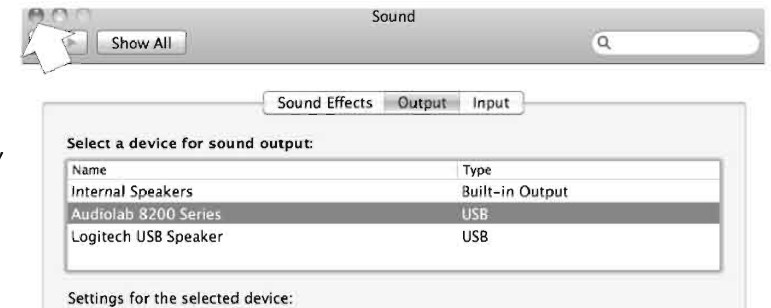

Go to the Desktop

A: Click the "Finder" Icon

B: Click "Applications"

C: Click "Utilities"



10b: Using the 8200CDQ with a Mac - 2


From the Utilities Screen
Click "Audio MIDI Setup"

The "Audio Devices" Screen appears



Setting Up the 8200CDQ:

- 1: Highlight "Audiolab 8200 Series" in the list.
- 2: In the pop up menu: select "Use this device for sound output"
Music from iTunes will be directed to the 8200CDQ but the alert sounds will be sent to your secondary speakers.
- 3: Set the format to "44,100 Hz - 24bit".
- 4: Select the USB input on the 8200CDQ.
- 5: Start iTunes, and choose a track to play.
Press ► to play or
Choose a track with the ►► ◀◀ buttons and then press ►►
Press ►► or ◀◀ to select next/previous tracks.
Press ► to pause and restart play.
Press and hold ►► ◀◀ or ►► ◀◀ to search forward/reverse.



Notes: Altering Bit Depth and Sampling Rate.

The default sampling rate should be selected as 44,100 Hz 24 bit. If you are playing music at other sampling frequencies, you should set the sampling rate (see Note 4 above) to match that rate. The bit depth should at all times remain set to 24 bit.

* After changing the format, it is necessary to quit iTunes and then re-open it.

DSP Processing and Resampling:

Always pass a Digital signal to the 8200CDQ **without** any DSP processing or resampling at the source. This will allow the upsampling circuits in the 8200CDQ to work at their optimum.

A Bit Perfect media player for the Mac

For the audiophile with an experimental outlook a very recent free media player for the Mac is AyreWave. For further information and to download the player visit <http://sbooth.org/AyreWave/>.

AyreWave requires Mac OS X 10.5 (Leopard) or later.

For audiophile users desiring more control over their audio, AyreWave can take exclusive control of the output device and send audio in the device's native format. Additionally, AyreWave can automatically adjust the output device's sample rate to that of the playing track, preventing audio quality degradation associated with software sample rate conversion. Finally, AyreWave can load and play files entirely in memory, eliminating audio glitching associated with disk access.

The player has several interesting features, including the ability to play lossless compressed formats such as FLAC, widely used on the PC platform but not supported in iTunes.

11: Troubleshooting

Until you are familiar with the operation of your 8200CDQ you may experience occasional difficulties. This guide will help you overcome the most likely issues.

No response/poor response to handset commands

Check that:

- the 8200CDQ is switched on.
- there are fresh batteries in the remote control.
- the 8200CDQ's display window is visible and you are pointing the remote control towards it.
- CD mode is enabled on the handset. (CD LED flashes when a key is pressed)

No sound

Check that:

- your signal source/pre/power amplifier(s) are connected correctly and switched on.
- the correct source is selected and the volume is turned up.
- "Mute" is not engaged

Sound is poor quality / distorted

Check that:

- all cables are making good connections. If necessary, switch off the power, then withdraw the connector and plug it back in again, then switch on the power.

Digital Inputs display "No Lock".

Check that:

- the digital source is switched on and streaming.

USB input displays "No Link"

Check that:

- the USB port is correctly connected.
- the USB handshake has gone down or the computer has "gone to sleep".

I hear crackles/interference when playing a USB source

Check that:

- you are using a certified USB 2.0 interconnect, connected directly to your computer and not via a hub or extension lead.
- A device such as a bluetooth device, a webcam, wireless devices may cause interference. Avoid sharing a USB outlet between the 8200CDQ and other devices and where possible, disable non-essential devices.

12: Technical Description

The Audiolab 8200CD/Q features a state-of-the-art external Stereo Digital to Analogue converter (the ESS Sabre32 9018 DAC) a Fully Balanced output, and Clock-Locked CD transport.

Jitter Reduction - The Audiolab Solution

To deliver superb sonic performance Audiolab utilising a proprietary high performance discrete Master clock in conjunction with the Sabre32 patented sample rate converter in order to minimise Time Domain errors (Jitter) from all Digital input sources. The result is 100% Jitter attenuation within the Digital domain – leaving only the inherent jitter of the CD's on board local Clock oscillator. This onboard Low Phase Noise Master clock, achieves sub pS jitter levels within the most critical frequency band.

Audiolab's "CATDA" - Time Domain Isolation

While the patented Sabre32 Sample Rate Converter achieves 100% Jitter attenuation within the Digital domain, external "Analogue domain" induced artefacts via RF breakthrough and PSU coupling etc. will affect the DAC's ultimate Sonic Performance. Audiolab resolves this critical issue by its uniquely developed "CATDA" (Cascaded Asynchronous Time Domain Attenuator) circuit. This circuit isolates the DAC substrate from the potentially detrimental analogue domain effects of non-synchronous digital input data. To achieve the ultimate performance level, 3 identical cascaded stages are used – each individual stage providing increased isolation, thereby maximising timing performance even at higher RF frequencies.

Upsampling / Oversampling

The Upsampling / Oversampling circuit converts the digital signal from one sample rate and bit depth to another. The sample rate is increased from the input sample frequency to 84.672MHz. With CD and USB 44.1 & 88.2 kHz inputs, the Oversampling process is synchronous, while other inputs and sample rates are Asynchronous Upsampled. All bit depths are extended to a minimum of 32 bits for internal processing.

The Audiolab 8200 CD operates in integer oversampling or upsampling mode, operating the DAC at 84.672MHz depending upon digital input source and sample rate:-

- With its internal Clock-Locked CD transport and 44.1 KHz based Asynchronous USB, the output DAC Rate is x1920 Integer Oversampled, Other non-synchronous 44.1 KHz digital input sources are x1920 times Upsampled
- 48 KHz Digital input sources are x1764 Upsampled
- Asynchronous 88.2 KHz USB – Integer x960 times Oversampled, other 88.2 KHz input sources are x960 Upsampled
- 96 KHz Digital input sources are x882 Upsampled
- 176.4 KHz Digital input sources are x480 Upsampled

Selectable and upgradeable Audiolab Digital filters

As Digital audio reproduction technology has progressed, the importance of the characteristics of Digital filters has become appreciated and better understood. The Audiolab CD/Q features in house Audiolab developed user selectable Digital filters for optimal listing and measurement modes. These, in addition to more conventional types for easy comparison, allow the user to tune the performance to his or her preference depending on system and musical tastes.

Audiolab DAC

The Sabre32 DAC integrated circuit (Chip) provides the conversion of the Digital signal to the Analogue domain. 256 individual DACs per channel are used within the chips to increase inherent conversion resolution, while also reducing static conversion errors – a total of 512 DACs are used in a true balanced stereo configuration.

The conversion process within the Audiolab 8000CD results in the 512 DAC elements (256 DACs per channel) each operating at 84.672MHz, - a conversion process switching 3840 times higher than the typical audio upper bandwidth of 22 KHz. Without this Digital Upsampling technology, the analogue filters could affect frequencies at or near the audible range, resulting in unwanted level and phase variation within the audio band.

The ESS9018 Sabre32 DAC is a hybrid Multi-Bit Delta-Sigma DAC, which aside from its unique Jitter attenuation structure utilizes a novel "Hyperstream" modulator. This is an advanced form of Multi-Bit Delta-Sigma modulator structure which combines several methods to optimise the conversion process. The Hyperstream modulator is designed for optimal transient response, thus eliminating dynamic response deficiencies and noise floor modulation artefacts typical of traditionally designed Delta-Sigma DAC's.

Discrete Class A Analogue Stages

In addition to the close attention to the Master Clock Phase noise performance (Jitter), DAC section and PCB layout, another critical part of the circuit design in the Audiolab CD is the DAC's True Balanced analogue outputs — connected directly to a pair of proprietary AudioLab FET based Class A stages buffers per channel. These FET based High current Class A buffers make a huge difference in transparency, resolution and dynamic performance.

The CD is fully DC coupled. High Tolerance Polypropylene Film / Foil capacitors, Ultra Stable Very Low VCR 0.1% MELF SMD resistors are used in the signal path to achieve the maximum audio performance.

96KHz – 24Bit Clock-Lock Asynchronous USB

When connecting the Audiolab 8200CDQ to a computer via USB, the DAC operates in "Asynchronous" USB mode (This should not be confused with Asynchronous Sample Rate Conversion - ASRC), where the AudioLab DAC controls the flow (speed) of the Audio data

streamed from the computer by providing a feedback control pipe (Control signal) to the computer over the USB Bus.

In Asynchronous mode, the Audiolab DAC has total control over the timing of the Audio Data transmission. The CD will instruct the computer to slow down or speed up the data transfer as necessary, thus avoiding any negative effects of full or empty buffer levels which can manifest itself as audible dropouts, pops or clicks – this speed control of Data transfer is referenced to the DAC's internal Clock. Audio replay does not rely upon the computer's poor internal clock source. The computer is effectively Clock-Locked to the DAC's internal High precision, low Jitter Master Clock. This is the key feature that allows for Hi-Fi quality reproduction from USB sources.

Remote Control of PC Media Player

The Audiolab 8200CDQ features a full system remote control, which not only allow control of other units within the Audiolab 8200 range, but also allows control of a PC / MAC / Media device over the USB connection from the armchair. When connected to the Computer, the CD identifies itself as an Asynchronous DAC, and an HID compatible device (Human Interface Device) – this allows driverless control of the PC / MAC Media Player.

The Power Supply

The stability and low noise of power in any audiophile equipment is imperative to achieving ultimate performance. The CD/Q uses multistage regulation – with a total of 34 regulated supplies, of which 14 are ultra low noise discrete designs, combined with LC filtering for maximal inter-stage and RF isolation, a total of almost 250,00µF of bulk storage capacitance is used within the CD.

To achieve the very best from the ESS Sabre32 DAC chip requires Ultra Low Noise digital power supplies. 10 regulators surround the DAC section with bulk decoupling provided by Organic Ultra Low ESR capacitors to eliminate noise and distortion on any supply rail within the DAC.

High Quality SMT Component Manufacturing

The Audiolab 8200 CD uses precision SMT manufacturing, with computerised optical inspection systems for 90% of its 1700+ components. The remaining components are hand inserted by our highly trained production team, and QC tested at each stage of the manufacturing process for consistency and performance. Every component from the simplest resistor to the power transformer within the 8200 CD has been carefully selected and verified by the UK design team to achieve the highest audiophile standards.

13: Service & Warranty

Care & Cleaning

While cleaning is in progress the AC power cord must be unplugged from the AC power supply socket.

Grease or dirt on the equipment may be removed with a soft, lint-free cloth slightly moistened with a mild solution of warm water and detergent or washing-up liquid. Do not use any other solutions or solvents.

If you have any queries regarding the use of Audiolab equipment, consult your dealer.

Servicing

Servicing of Audiolab products should only be carried out by authorised service agents. If service is required the equipment should be returned, securely packaged, preferably using original packaging, to your dealer.

In the UK equipment may be returned to the IAG Service Centre address shown on this page.

Always telephone before returning any equipment.

A note should be enclosed with your name, address, telephone number, and a brief description of the reason for return.

If you require Service outside the Warranty period, do not hesitate to contact your dealer.

Service Address

IAG Service Centre
Unit 4, St Margaret's Way
Stukeley Meadows Industrial Estate
Huntingdon Cambs
PE29 6EB
England

Tel: +44 (0)1480 452561: Fax: +44 (0)1480 413403

Audiolab limited warranty

Audiolab Ltd. warrants this product, subject to the terms and conditions below, to be free from defects in materials and workmanship. During the warranty period Audiolab will repair or replace (at Audiolab's option) this product, or any defective part in this product, if it is found to be defective due to faulty materials, workmanship or function. The warranty period may vary from country to country.

Terms and conditions:

The warranty starts on the date of purchase (or the date of delivery if this is later).

You must provide proof of purchase / delivery before work can be carried out. Without this proof, any work carried out will be chargeable to you.

All work will be carried out by Audiolab or its authorised agents or distributors. Any unauthorised repair or modification will void this warranty.

If any part is no longer available it will be replaced with a functional replacement part.

Any parts that are replaced will become the property of Audiolab.

Any repair or replacement under this warranty will not extend the period of warranty.

This warranty is valid only in the country of purchase, applies only to the first purchaser and is not transferable.

The following are not covered:

- Products on which the serial number has been removed, altered or otherwise made illegible.
- Normal wear and tear and cosmetic damage.
- Transportation or installation of the product.
- Accidental damage, faults caused by commercial use, acts of God, incorrect installation, connection or packaging, misuse, neglect or careless operation or handling of the product which is not in accordance with Audiolab's user instructions.
- Equipment that has been operated in conjunction with unsuitable, inappropriate or faulty apparatus.

- Repairs or alterations carried out by parties other than Audiolab or its authorised agents or distributors.
- Products not purchased from an Audiolab authorised dealer.
- Products that were not new at the time of original purchase.
- Products sold 'as is', 'as seen' or 'with all faults'.

Repairs or replacements as provided under this warranty are the exclusive remedy of the consumer. Audiolab shall not be liable for any incidental or consequential damages for breach of any express or implied warranty in this product. Except to the extent prohibited by law, this warranty is exclusive and in lieu of all other warranties whatsoever, both express and implied, including, but not limited to, the warranty of merchantability and fitness for a practical purpose.

This warranty provides benefits that are additional to and do not affect your statutory rights as a consumer.

Some countries and US states do not allow the exclusion or limitation of incidental or consequential damages or implied warranties so the exclusions in the paragraph above may not apply to you. This warranty gives you specific legal rights, and you may have other statutory rights, which vary from state to state or country to country.

How to claim:

To obtain warranty service contact the Audiolab authorised dealer from which you purchased this product. Do not despatch goods without the prior agreement of the dealer, Audiolab or their authorised distributors.

If asked to return products for inspection and/or repair, pack carefully, preferably in the original cartons or packaging affording an equal degree of protection, and return prepaid. If unsuitable packaging is used, Audiolab may make a charge for the supply of new packaging.

Insurance is recommended as goods are returned at owner's risk. Audiolab or their authorised distributors cannot be held liable for loss or damage in transit.

Packing, insurance and freight on the return journey will be paid by Audiolab or their authorised agents or distributor if corrective work proves to be necessary.

14: Specifications and Features

Specifications

Output Level @ 1kHz	RCA: 2.05Vrms \pm 0.1dB XLR: 4.1Vrms \pm 0.1dB
Frequency Response, ref. 1kHz, 20Hz to 20kHz	RCA: \pm 0.2dB XLR: \pm 0.2dB
THD 1kHz, 0dB, 20Hz to 20kHz 'A' weighted	RCA: <0.0025% XLR: <0.008%
Crosstalk, 1kHz	RCA: -120dB XLR: -130dB
Dynamic Range 'A' weighted	RCA: >98dB XLR: >100dB

Product Features

- 32Bit 84.672 MHz Oversampled / Upsampled 512 Element MultiBit Array DAC
- x1 920 times Oversampled with CD / USB 44.1kHz Source
- Asynchronous USB supporting 24 Bits / 96kHz with Driverless Remote Control of PC / MAC Media Player (Via HID Support)
- x2 176.4 kHz 24Bits Coax SPDIF Digital Inputs
- x2 96 kHz 24Bits Optical Digital Inputs
- x3 Analogue Line Inputs
- Low Jitter Optical and Coax SPDIF Output (CD Digital Output only)
- High Current Single Ended & Balanced Discrete Class A Output stages
- Custom CD Servo Design – with Ultra Low Noise PSU for OPU
- Full remote control & External Remote I/O bus
- 34 Regulated supply rails
- 14 Ultra Low Noise Discrete Regulators
- User Selectable Digital Filters – Software upgradeable Via USB Port
- User Selectable Analogue/Digital output mode when replaying CD or digital inputs.
- Master Clock Jitter less then 3pS Short Term. Measured directly at DAC "XOut"
- Organic Ultra Low ESR capacitors, High Tolerance Polypropylene film / foil capacitors, Ultra Stable Very Low VCR 0.1% MELF SMD resistors, 4 Layer PCB.



IAG-A.LAB

Correct Disposal of this product. This marking indicates that this product should not be disposed with other household wastes throughout the EU. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. To return your used device, please use the return and collection systems or contact the retailer where the product was purchased. They can take this product for environmental safe recycling.

**Audiolab
IAG House,
Sovereign Court,
Ermine Business Park,
Huntingdon PE29 6XU
Tel: 01480 447700
Fax: 01480 431767
<http://www.audiolab.co.uk>
CODE:AH10-MNLO005**